



## - Quick Installation Guide -

Be running in 10 minutes!


### Minimum System Requirements

- Pentium 4 (or AMD equivalent)
- 512MB RAM
- 200MB Hard Drive space to store dictation (500MB recommended - 15MB for application itself) \*
- 1 USB port (1.0 or higher)
- CD-ROM drive (to run the installer)
- Internet access (to activate VS Recorder)
- Windows XP or Vista

### Software Installer

**Step 1.** Insert the CD. Select *VS Recorder Lite* from the screen that pops up. This will begin the setup.

**Step 2.** Accept the software agreement. Now **select which model** of the VS Recorder you have: 2 or 4 ports.

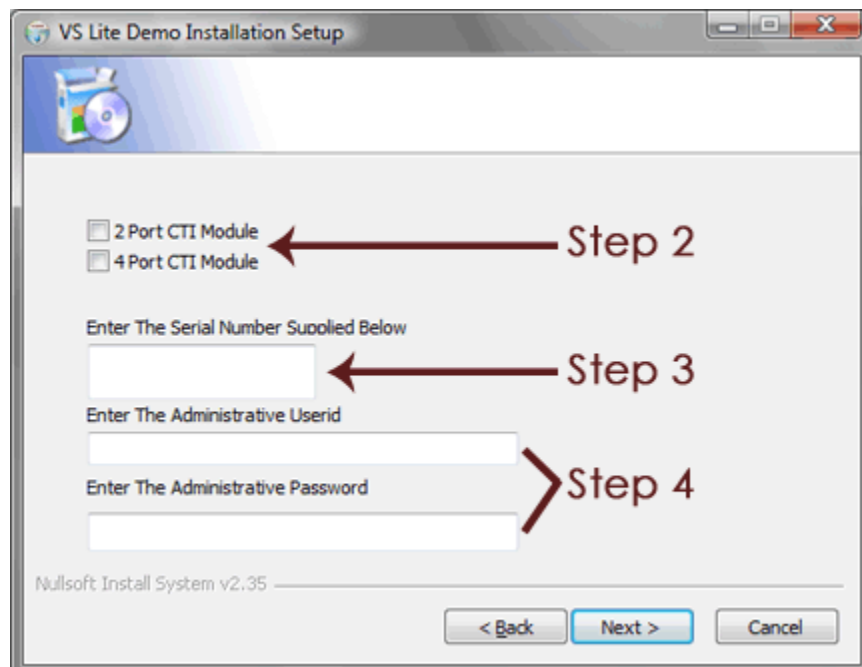


**Step 3.** Enter the serial number. This is on the bottom of the voice card and is the last 5 numeric digits (e.g. the sticker might read: **SHT-2B/USB G0012345**, with **12345** being the serial number).

**Step 4.** Enter a Windows **administrative username** and **password**. This can be the local account you are logged into if it has administrative rights on the computer, or another user account. Click **Next**.

**Note:** If you don't know the administrative username and password, this information can be entered after the installation is finished.


**Step 5.** The installer will begin copying files. If you are running the setup **on a Microsoft Windows Vista** computer, you may receive a prompt like the one below. Always click **Install this driver software anyway**. The progress bar will stop for a while about  $\frac{3}{4}$  through the installation. This is *normal*.

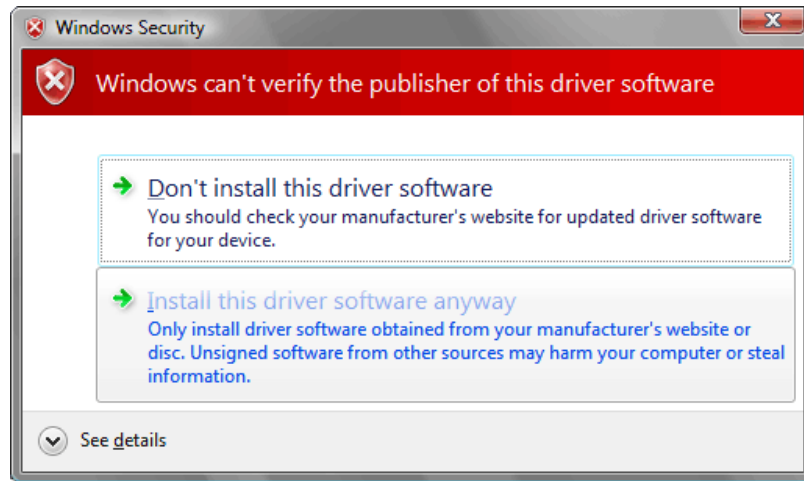


**Step 7.** The installer will finish and inform you to install the USB drivers and then reboot your computer. Plug the voice card into the USB port you intend to use on your computer.

**Note:** If you plug with voice card into another USB port in the future, you may have to repeat the following steps. Windows loads USB drivers on a per port basis.

**Step 8.** The computer will tell you it has found new hardware. The Found New Hardware Wizard *may* appear (below). If this screen appears, choose **No, not this time** and click **Next**.

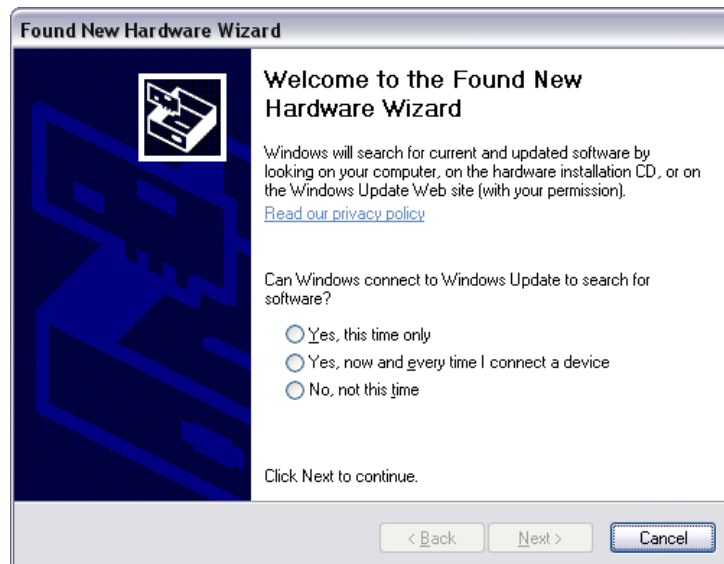

**Step 9.** Choose **Install the software automatically (Recommended)** and click **Next**. Windows will install the drivers. Click **Finished** when done. You may receive an error that says a problem occurred during the installation, or that the drivers were not loaded successfully. If this happens, unplug the voice card and then plug it back into the same port. If the Found New Hardware Wizard appears, follow steps 8-9 again. The drivers will now load successfully.

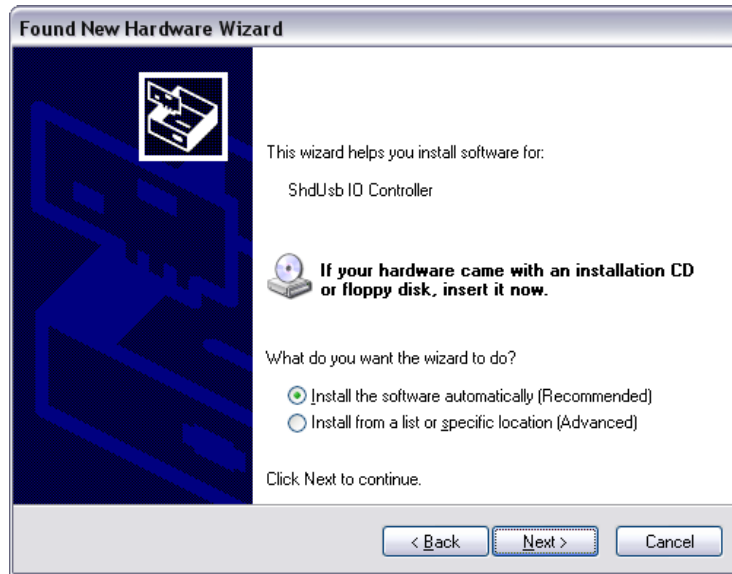

**Step 10.** You should now have a green light on the telephony card. Leaving the voice card plugged in, **reboot** the computer.

**Step 11.** Once Windows has loaded, the voice card's green light should be blinking. This means the Recorder service is running.

**Step 11.** Only one port will be active until the VS Recorder has verified the serial number provided is a valid DAC serial number. If the internet is currently not available on the computer, connect it to the internet and reboot your computer. If the serial number you entered during the installation is valid, all remaining ports will be activated.

---

## Hardware Setup

**Step 1.** Plug your telephone line(s) into the appropriate jack on the voice card. Below is a picture of the back of a 2 port voice card. Note that **Line 1 = Port 1**, **Line 2 = Port 2**, etc. Setup is complete!

